


Dimension:-

MODEL	SOP-1
A	101.7
B	69.7
C	54.5
D	12
E	32
F	34.7
G	4.5
H	37.7
I	5
J	29.2
K	7.5
L	34.2
M	49.2
N	30.4
O	10
ØP	34
Q	18.2
ØR	27
S	M8
T	19
U	38
ØV	Ø8
W	1.1
(O RING) X	ID 5x1.5
ØY	Ø5.5
Z	4.5
ZA	1/8 BSP
ZB	1/4 BSP
ZC	9.5
Weight	1.3kg

MODEL INDICATION

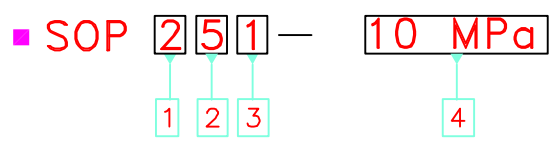

- 1) Port size:- Rc 1/4”BSP threaded
- 2) Sequence operating pressure control range 10~70 Bar
- 3) Design No.
- 4) Set pressure. :-  
(Set valve sequence operating pressure)  
Note:- write the set pressure accurately including unit 10MPa,(105kgf/cm<sup>2</sup>)

Specifications

MODEL NO.	SPO-1
Range of adjustment for sequence valve adjusting pressure MPa	10~70 Bar
Operating pressure MPa	10~70 Bar
Operating temperature °C	0~70C°
Fluid used	Equivalent to ISO-VG-32 general hydraulic oil