

FLASHER & SOLENOID



GE 2207

Solenoid Valve

Rating : 12V DC

Air leakage : 0.5 l max/min at On & Off



GE 1562

Flasher

Rating : 12V DC

Flash Rate : 70 c/m



GE 1565


Unit Flasher

Rating : 12V DC

Flash Rate : 90 c/m

Starting Time : 1.5 max

SCHEMATIC DIAGRAM

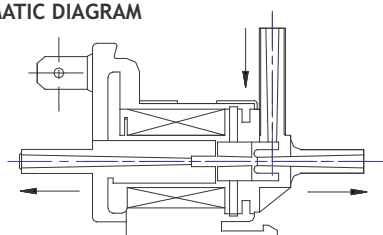

GE 767

Float Assembly

Rating : 12V DC

Type : Resistance

Material of Float : Polyurethane foam

Resistance Standard

Float Position	Resistance	Fuel in liters in falling level
Empty	110 + 7 ohms	5.5 - 8.5
Half	32.5 + 4 ohms	20.5 - 23.5
Full	3 + 2 ohms	39.5 - 42.5