
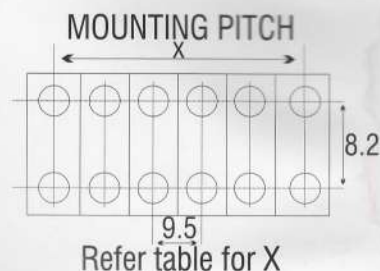


## SERIES 1213 BARRIER TYPE TERMINAL BLOCK 9.5mm PITCH

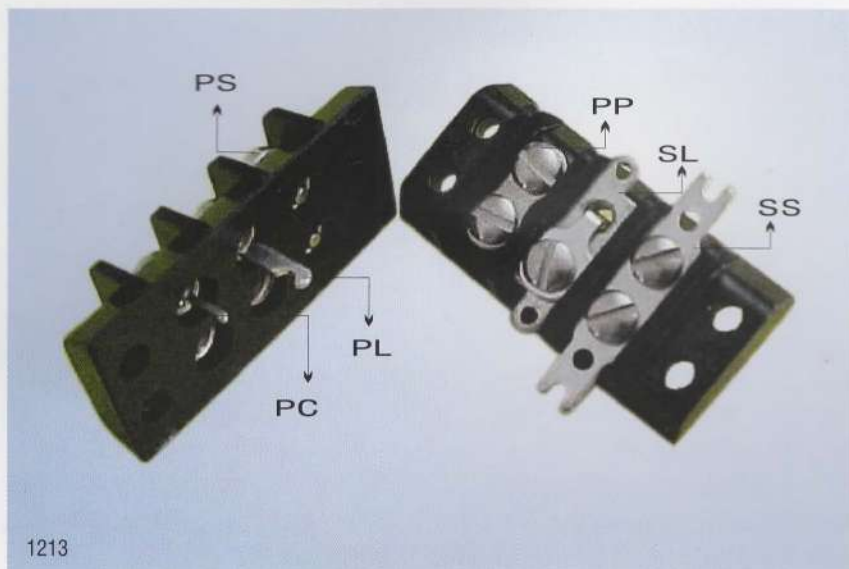

### SPECIFICATIONS

CURRENT RATING: 10Amps  
WORKING VOLTAGE: 500V  
INSULATION RESISTANCE: 100M OHMS  
VOLTAGE BREAKDOWN: 1.5KV  
TERMINAL PITCH: 9.5 mm.

### ORDERING CODES

1213- XX YY

NO OF WAYS

(AVAILABLE ARE:

2, 3, 4, 5, 6, 7, 8, 9,

10, 11, 12, 13, 14, 15,

16, 17, 18 & 20.)

PP- PLAIN - PLAIN

PS- PLAIN SOLDER

SS- SOLDER SOLDER

PL- PLAIN BACKFEED

SL-SOLDER BACKFEED

PC-PC TYPE FOR HOLE DIA. 1.6

NO OF WAYS	DIM 'X' (in mm)
2	28.5
3	38.5
4	48.0
5	57.5
6	67.0
7	76.5
8	86.0
9	95.5
10	105.0
11	114.5
12	124.0
13	133.5
14	143.0
15	152.5
16	162.0
17	171.5
18	181.0
20	200.0

### NOTE

1- FOR INDUSTRIAL GRADE TERMINAL BLOCK  
MENTION 1214 AGAINST 1213.

2- CONTACTS ARE NICKEL PLATED.

3- SOLDERABLE CONTACT ARE TIN PLATED.