


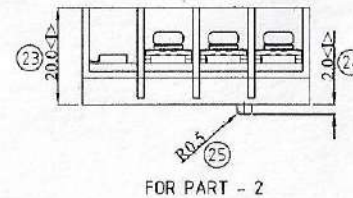
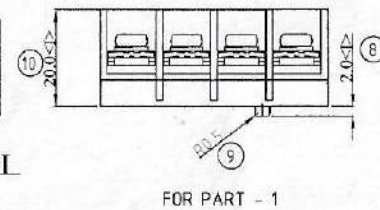


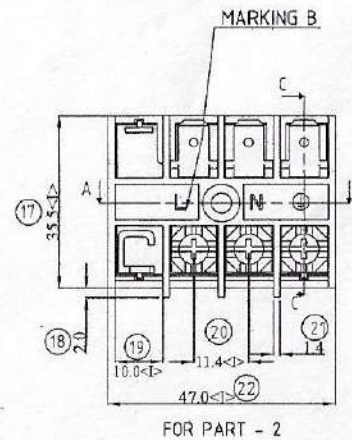
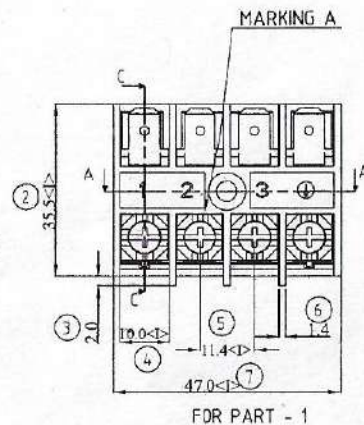


LAST -31

REVISIONS

REV	DATE	DETAILS

NOTE:- DRG. NO. 1265-01(P4) & 1265-02 (P4) COMBINED TOGETHER



MARKING A
123①
FOR PART - 1

MARKING B
LN①
FOR PART - 2

IV	SCREW M4 X 10	1265-06-04	04	03	M.STEEL	TRIVALENT CHROME
III	TERMINAL PLATE	1265-27-03	04	03	BRASS (T = 0.8mm)	NI PLATING
II	HOUSING COVER	1265-54-02	01	01	PBT (GF 30%) (UL94V-0)	BLACK
I	HOUSING	1265-54-01	01	01	PBT (GF 30%) (UL94V-0)	BLACK
S.NO	DESCRIPTION	ITEM NO	QTY (PART-1)	QTY (PART-2)	MATERIAL	FINISH

PART	1	2
PART NO	1265-01	1265-02

General Tolerances		
Dimension	Ls18 L≥18	Angle
Tolerance	±0.2 ±0.3	±5°

SPECIFICATION:-

- | | |
|--------------------------|------------------------|
| 1) RATING | 300V AC 25A |
| 2) APPLICABLE WIRE | 0.5 ~ 4mm ² |
| 3) RELATIVE HUMIDITY | 45 ~ 95 % RH |
| 4) AMBIENT TEMPERATURE | -20° ~ +60°C |
| 5) STORAGE TEMPERATURE | -20° ~ +70°C |
| 6) WITHSTAND VOLTAGE | 2500V AC FOR 1 min |
| 7) INSULATION RESISTANCE | MORE THAN DC500V/100MΩ |

PART SHOULD BE ROHS COMPLIANT
ALL DIMENSIONS ARE IN MM.

DESCRIPTION	Issue	APPD	MANJIV	SIGNATURE	DATE
		CHKD	PANKAJ		
TERMINAL SEAT 4 WAY (SMALL)	P5				
PART NO	3:2	DRWN	MANINDERJIT		13MAR,2020
(1265 - XX)			NAME	SIGN	DATE
Gilard Electronics Pvt. Ltd. S.A.S Nagar					



LAST - 20

REVISIONS



REV	DATE	DETAILS
P1	20/08/2019	1) ITEM NO 1266-54-01 & 02 MATERIAL CHANGED FROM PBT (GF 30%) FR GRADE TO PBT(GF 30%) UL94V-0. 2) ADDED GILARD LOGO & PRODUCT NO. ON COVER.
P2	06-01-2020	1) HOUSING COVER DESIGN UPDATED. 2) B.O.M BALLOONING ADDED.
P3	18-01-2020	1) BALLOONING 22, 23 AND 24 REMOVED.
P4	12-03-2020	1) General Tolerance Note Added.




Isometric View

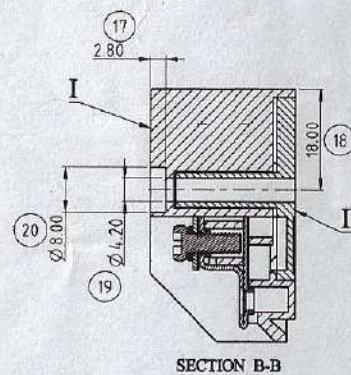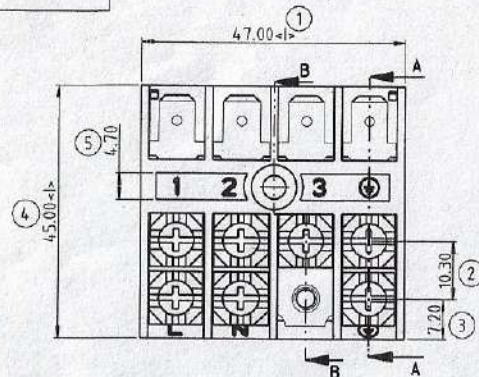

SECTION B-B

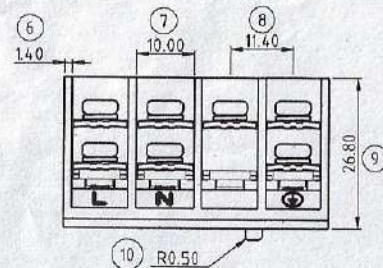

SECTION A-A

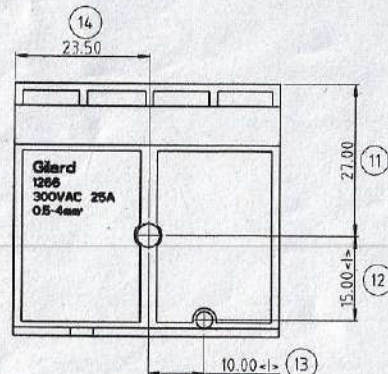

SPECIFICATION:-

- | | |
|--------------------------|------------------------|
| 1) RATING | 300V AC 25A |
| 2) APPLICABLE WIRE | 0.5 ~ 4mm ² |
| 3) RELATIVE HUMIDITY | 45 ~ 95 % RH |
| 4) AMBIENT TEMPERATURE | -20° ~ +60° C |
| 5) STORAGE TEMPERATURE | -20° ~ +70° C |
| 6) WITHSTAND VOLTAGE | 2500V AC FOR 1 min |
| 7) INSULATION RESISTANCE | MORE THAN DC500V/100MΩ |

PART SHOULD BE ROHS COMPLIANT
ALL DIMENSIONS ARE IN MM.

General Tolerances

Dimension	L≤18	L≥18	Angle
Tolerance	±0.2	±0.3	±5°

IV	SCREW M4 X 10	1265-06-04	07	M.STEEL	TRIVALENT CHROME
III	TERMINAL PLATE	1266-27-03	04	BRASS (T=0.8mm)	NI PLATING
II	HOUSING COVER	1266-54-02	01	PBT (GF 30%) (UL94V-0)	BLACK
I	HOUSING	1266-54-01	01	PBT (GF 30%) (UL94V-0)	BLACK
S.NO	DESCRIPTION	ITEM NO	QTY	MATERIAL	FINISH

DESCRIPTION

TERMINAL SEAT 4 WAY (BIG)

PART NO

1266

Issue	APPD	MANITV	DATE
P5	CHKD	PANKAJ	12/3/20
Scale	DRWN	MANINDERJIT	12/3/20
		NAME	SIGN
			DATE

Gilard Electronics Pvt. Ltd.
S.A.S Nagar