

# COBRA III



# Semi-automatic wrapping machine for pallet loads



## Flexible, efficient and functional pallet wrapping solution

### Flexibility


Thanks to the rotating arm technology the palletized load does not move during the stretch wrapping process. Therefore the Cobra III is ideal for wrapping loads that are unstable, very light or very heavy, odd-sized and of any shape, whatever the type of product is. The Cobra III can be mounted on a wall, to a pillar or can be equipped with an independent floor stand.

### Efficiency

The motorized Power Pre Stretch System with stepless control of film tension guarantees optimum usage of film. Best possible reduction of film consumption optimizes packaging costs per pallet. Due to the overhead style design minimum space requirement is needed and there's no need for an additional access ramp.

### Functionality

Four individual wrapping programs can be stored and therefore operation of the machine is very simple. The programs include eight functions which are adjustable to meet precisely the demands of an optimal packaging. The Cobra III wrapping machine has no metal parts touching the floor, so it's easy to clean underneath.

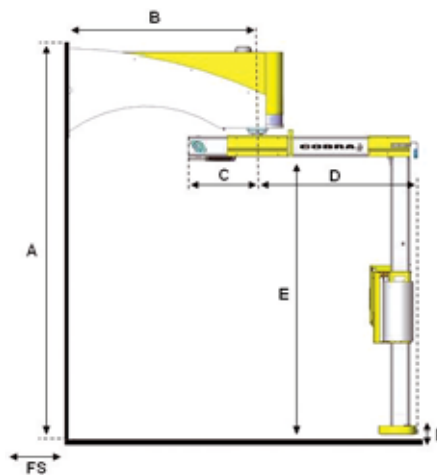

*The Power Pre Stretch carriage is driven by belt lift and pre stretch wheels are easy to remove and change.*

### Dimensions (mm)

Overall height	A	3350/3750/4100
Mainframe rotation point	B	1590/1740
Arm end length	C	580/430
Arm length	D	1510/1660
Distance under arm	E	2250/2650/3000
Floor clearance	F	45
Floor stand	FS	500

Wrapping area (diam.)	WD	2000/2300
Rotation area (diam.)	RD	3150/3450

### Technical details

Rotation speed	12 rpm
Capacity	up to 35 pallets/hour
Weight (calculated)	500 kg
Voltage	230 VAC - 1 phase 50 Hz
Control	PLC/CAN-bus
Film reel width	500 mm
Max. film reel diameter	260 mm

### Accessories

- Supplementary parts pack for wrapping area 2300 mm
- Supplementary parts pack for pallet heights 2550/2900 mm
- Floor stand

*Please contact your local distributor for additional information.*