


### Safety Shower

MODEL **6220 GI**

<b>DESCRIPTION</b>	Emergency GI Safety Shower cum Eye Wash fountain hand operated. Model-6220 GI.
<b>DETAIL COMPONENT SPECIFICATION</b>	
<b>1. SHOWER HEAD</b>	Made of highly visible yellow ABS plastic. Shower head is between 82" to 96" above floor surface. (Size-265 mm)
<b>2. PULL ROD</b>	For supply and control of water flow in shower head. Pull rod is within 69" height above floor surface. (Size-737 mm)
<b>3. SHOWER VALVE</b>	Through passage valve that opens automatically when the lever is pushed or pulled. The valve stays open until it is manually closed.
<b>4. EYE WASH HEAD</b>	Two high-flow sprays, operated at low pressure, which washes the eye and face. Anti-dust cover protects the head from airborne contaminants and automatically opens with the water pressure. (Distance between two eye wash head-165 mm).
<b>5. EYE WASH BOWL</b>	Highly visible yellow ABS plastic resistant to damage from most acid, alkali and oil. (Size-298mm)
<b>6. PUSH TO OPEN VALVE</b>	Its connect unit to uninterrupted water supply of 3 gallons.
<b>7. BASE PLATE</b>	To hold the shower structure in a stable position (Size-180mm).

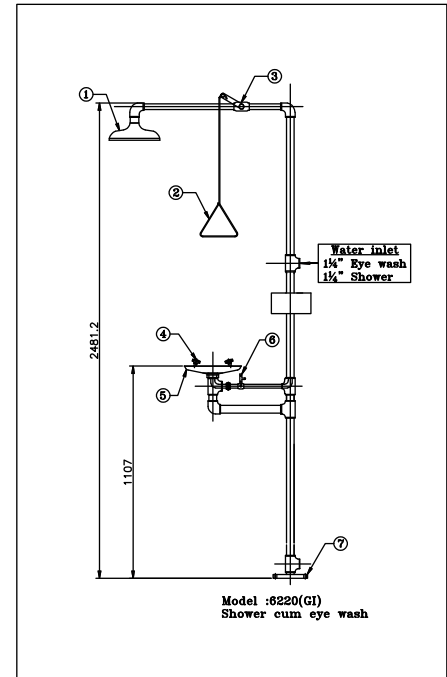

<b>WATER INLET CONNECTION</b>	1 ¼" Eye wash 1 ¼" Shower	
<b>WATER OUTLET CONNECTION</b>	1 ¼" Tee.	
<b>SUPPLY WATER CONDITION</b>	Supply Water	Drinking Water
	Operating Press.	2.81 Kgf/cm <sup>2</sup> (40 PSI)
	Operating Temp.	Ambient
<b>MATERIAL</b>	1) Pipe	GI
	2) Fitting	GI
	3) Flange	Cast Iron
<b>WEIGHT</b>	16.710 Kg.	
<b>FLOW</b>	110 LPM	
<b>APPROVAL</b>	IS : 10592:1982	

**NOTE:** All dimensions are in millimeters. Qty/flow of water delivered from eyewash & shower shall be as per IS: 10592:1982

### Udyogi Plastics Pvt. Ltd.

294, B. B. Ganguly Street, 2nd Floor, Kolkata - 700 012  
 Tel. : +91 33 2225 1470/71/72 ▶ Fax : +91 33 2225 1486  
 E-mail : corp@udyogi.net ▶ Website : www.udyogisafety.com

▶ mumbai@udyogi.net ▶ delhi@udyogi.net  
 ▶ chennai@udyogi.net ▶ orissa@udyogi.net  
 ▶ abd@udyogi.net ▶ noida@udyogi.net