

165 A, 220 V

SASL-160TRA




SASL-160TF

AXXAIR

Technical characteristics:


- Orbital welding power source, 210 V - 230 V
- Max. current 165 A
- Power factor: 100 A, 100%
- Ideal for on-site work
- This model is a version of the 200 A source, and features the same programming interface
- Supplied with a memory card with 200 programs, 20 levels each
- Weight:
 - SASL-160TRA: 15 kg
 - SASL-160TF: 25 kg

ADVANTAGES

SD Flash card with 200 programs per card



5.7" multi-language, colour touch screen



Integrated printer

Accessories	References	Description	Consumables
SAGC-100: power source trolley	SASL-160TRA	Air-cooled source with drive card	SACW-C002: Coolant
SACF-020: Memory card	SASL-160T	Water-cooler source with single-shaft drive	SCIMP-01: printer spool
SALCF-020: memory card reader	SASL-160TF	Water-cooled source with dual-shaft drive, wire feed and wire	

210 A, Autoline

AXXAIR


Technical characteristics:

- Orbital welding power source, **autoline** with PFC compatible 110 V to 230 V
- Max. current **210 A**
- Power factor: **160 A, 100%**
- Scalable source, water-cooled, additional card (4 shafts: wire feed, AVC, OSC and wire)
- Supplied with a memory card with 200 programs, 20 levels each

ADVANTAGES



5.7" colour touch screen remote control. Secure, multi-lingual access (11 languages)



Easy-to-use touch screen features parameter calculation



Safe cooling to protect heads (flow rate, level, pressure)

Accessories	References	Description	Consumables
SAGC-100: power source trolley	SASL-200A	Air-cooled SC drive power source	SACW-C002: Coolant
SACF-020: Memory card	SASL-200E	Water-cooled SC drive power source	SCIMP-01: printer spool
SALCF-020: memory card reader	SASL-200EF	Water-cooled SC drive power source and wire	
	SASL-200TRA/SAS-200T	Air-cooled power source - 1 shaft / water-cooled source - 1 shaft	
	SASL-200TAO/TAOF	Water-cooled power source with AVC-OSC/ with AVC-OSC-Wire	

300 A, 400 V



SASL-300TF

AXXAIR


Technical characteristics:

- Orbital welding power source, **400 V**
- Integrated cooler: **1200 W** cooling capacity with 1L/min
- Cooling **safety** system: flow rate, pressure
- Max. current **300 A**
- Power factor: **210 A, 100%**
- Compatible with all AXXAIR heads
- Supplied with a memory card with **200 programs**, 20 levels each


ADVANTAGES



5.7" colour touch screen remote control. Secure, multi-lingual access (11 languages)



Drives up to 4 shafts, depending on the version: wire feed, AVC, OSC and wire



Integrated printer

Accessories	References	Description	Consumables
SAGC-100: power source trolley	SASL-300E	Water-cooled power source for SC	SACW-C002: Coolant
SACF-020: Memory card	SASL-300T	Water-cooler source with single-shaft drive	SCIMP-01: printer spool
	SASL-300TF	Water-cooled, shaft-drive power source and wire	
SALCF-020: memory card reader	SASL-300TAOF	Water-cooled power source, drive, wire feed, AVC, OSC and wire	

Power source/head compatibility table


POSTES TETES	SC121-A	SC121-E	SC171-A	SC171-E	SC221-E	SC321-E	SATF-40ND	SATF-65ND	SATF-115ND	SATO-80M	SATO-115M	SATO-170ND	SATO-220M	SATO-115NAO	SATO-170NAO	SATO-220MAO	SADF2	SAGC-100	SOAF	SASL200-04	SATMA-06	SATME-06
	Type	Prefab					T.fermées			T.ouvertes				TO AVC/OSC			Autres					
SASL-160TRA	O	N	O	N	N	N	N	N	N	O	N	N	N	N	N	N	N	O	N	N	N	N
SASL-160T	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	N	O	N	N	N	N
SASL-160TF	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	O	O	N	N	N	N
SASL-200A	O	N	O	N	N	N	N	N	N	N	N	N	N	N	N	N	N	O	N	O	O	N
SASL-200E	O	O	O	O	O	O	N	N	N	N	N	N	N	N	N	N	N	O	N	O	O	O
SASL-200EF	O	O	O	O	O	O	N	N	N	N	N	N	N	N	N	N	O	O	N	O	O	O
SASL-200TRA	O	N	O	N	N	N	N	N	N	O	N	N	N	N	N	N	N	O	N	O	O	N
SASL-200T	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	N	O	N	O	O	O
SASL-200TF	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	O	O	N	O	O	O
SASL-200TOA	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	N	O	N	O	O	O
SASL-200TOAF	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SASL-300E	O	O	O	O	O	O	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
SASL-300T	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	N	N	N	N	N	N
SASL-300TF	O	O	O	O	O	O	O	O	O	O	O	O	O	N	N	N	O	N	N	N	N	N
SASL-300TOAF	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	N	O	N	N	N

Y: Yes

N: No



SADF2

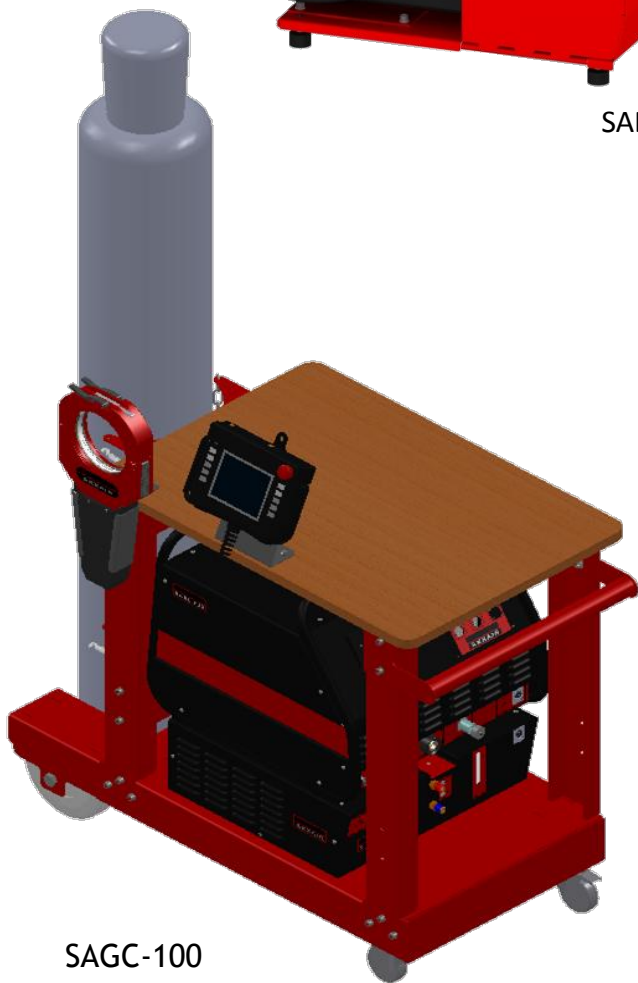

SAGC-100



SAGC-121

Accessories	Motors	Consumables	Options
SAGC-100: power source trolley SASL-200			
SAGC-121: Remote control support			
SADF2: external wire feeder			