


Medium Series

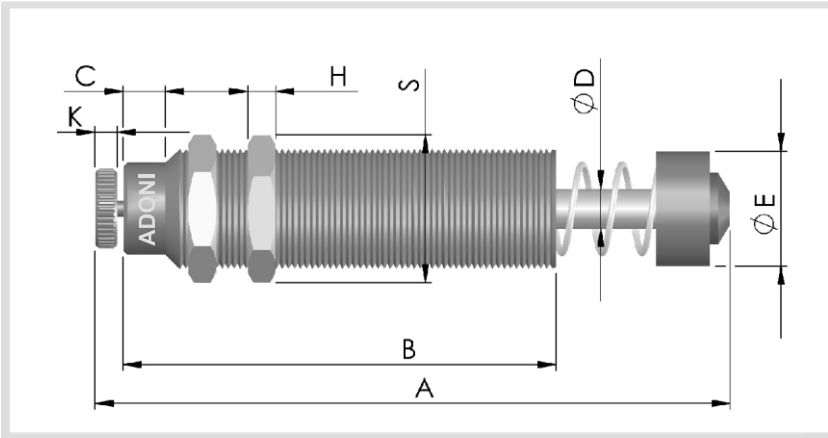

- Two locknuts inclusive
- Hydraulic Hardness Adjustable
- Spring Return (External)
- Urethane striker Cap
- Special Anticorrosive Finish
- Hardened and Polished Rod
- Special Viton Seals
- Adjustment axially at Bottom
- Nitrided wear parts for higher life
- Stainless steel model available
- special versions available on request

Technical Details

Dimensions in Millimeters

Model	Thread	A	B	C	D	E	F	G	H
AD 30-25 M	M 30X1.5	157	95	12	10	28	8	25	7
AD 33-25 M	M 33X1.5	157	95	12	10	28	8	25	7
AD 33-25 U	1 1/4-12U	6.2	3.7	0.5	0.4	1.1	0.3	1.0	0.3
AD 36-25 M	M 36X1.5	157	95	12	10	28	8	25	7
AD 37-25 M	M 37X1.5	157	95	12	10	28	8	25	7
AD 30-50 M	M 30X1.5	207	120	12	10	28	8	50	7
AD 33-50 M	M 33X1.5	207	120	12	10	28	8	50	7
AD 36-50 M	M 36X1.5	207	120	12	10	28	8	50	7
AD 37-50 M	M 37X1.5	207	120	12	10	28	8	50	7
AD 37-75 M	M 37X1.5	262	145	12	10	28	8	75	7

Performance Table

Model	Stroke	Energy	Absorbtion	Effective Mass		Spring Force		Wt. Gm
		Nm/stroke	Nm/h	Min.Kg.	Max.Kg.	Min.N.	Max.N.	
AD 30-25 M	25	120	82,000	10	1,800	40	70	640
AD 33-25 M U	25	120	82,000	10	1,800	40	70	640
AD 36-25 M	25	120	82,000	10	1,800	40	70	640
AD 37-25 M	25	120	82,000	10	1,800	40	70	640
AD 30-50 M	50	250	97,000	13	2,700	45	80	650
AD 33-50 M	50	250	97,000	13	2,700	45	80	655
AD 36-50 M	50	250	97,000	13	2,700	45	80	655
AD 37-50 M	50	250	97,000	13	2,700	45	80	660
AD 37-75 M	75	380	1,20,000	13	2,700	45	80	680

Note- Dimensions are subject to changes without prior notice.