


Mini Series

- Two locknuts inclusive
- Hydraulic Hardness fixed type
- Spring Return
- Urethane striker Cap
- Special Anticorrosive Finish
- Hardened and Polished Rod
- special Viton Seals
- Nitrided wear parts for higher life
- Stainless steel model available
- Special versions available on request

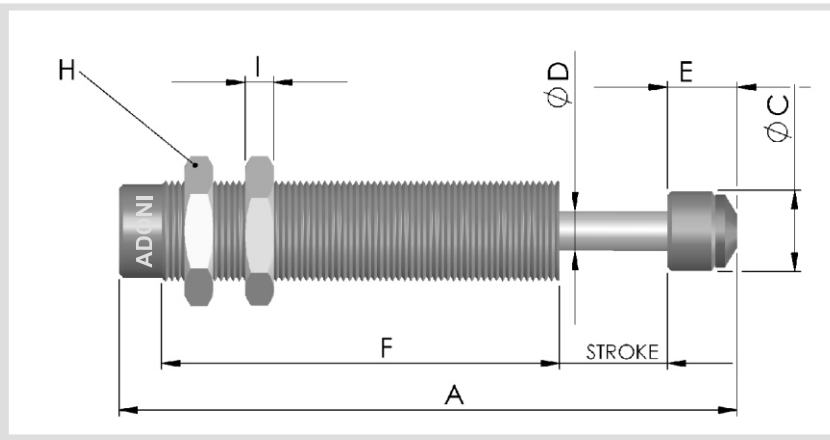

Technical Details

Dimensions in Millimeters

Model	Thread	A	B	C	D	E	F	H	I
AC 8-6 -F	M 8X1.0	50	38	6.6	2.8	6	33	11	3
AC 10-5-F	M 10X1.0	38.7	27.7z	8.6	3	6	22.9	12.7	3
AC 10-8-F	M 10X1.0	57	43	8.6	3	6	38	12.7	3
AC 12-10-F	M 12X 1.0	69.5	50	10.3	3	9.5	45.5	14	4
AC 14-12-M	M 14X1.5	102.3	76	12	4	14.3	67	19	5

Performance Table

Model	Stroke	Energy Nm/stroke	Absorbtion Nm/h	Effective Mass (Kg)			
				Very soft	soft	Hard	Wt. Gm
AC 8-6-F	6	2	8,800	0.5-2.0	2.0-6.0	2.0-6.0	11
AC 10-5-F	5	3	10,800	1.0-3.0	3.0-7.0	3.0-7.0	14
AC 10-8-F	8	4	15,200	2.0-4.0	4.0-9.0	4.0-9.0	20
AC 12-10-F	10	5	17,640	5.0-10.0	10.0-30.0	10.0-30.0	31.5
AC 14-12-M	12	15	30,000	8.0-50	50.0-100.0	50.0-100.0	80

Ordering Information

