



J. M. Engineering Co.

A Complete Process Control automation

Non Polyolefin Products


Heat Shrink Sleeve



AMS-M Heat Shrink Marker Sleeve

M-18

M-30

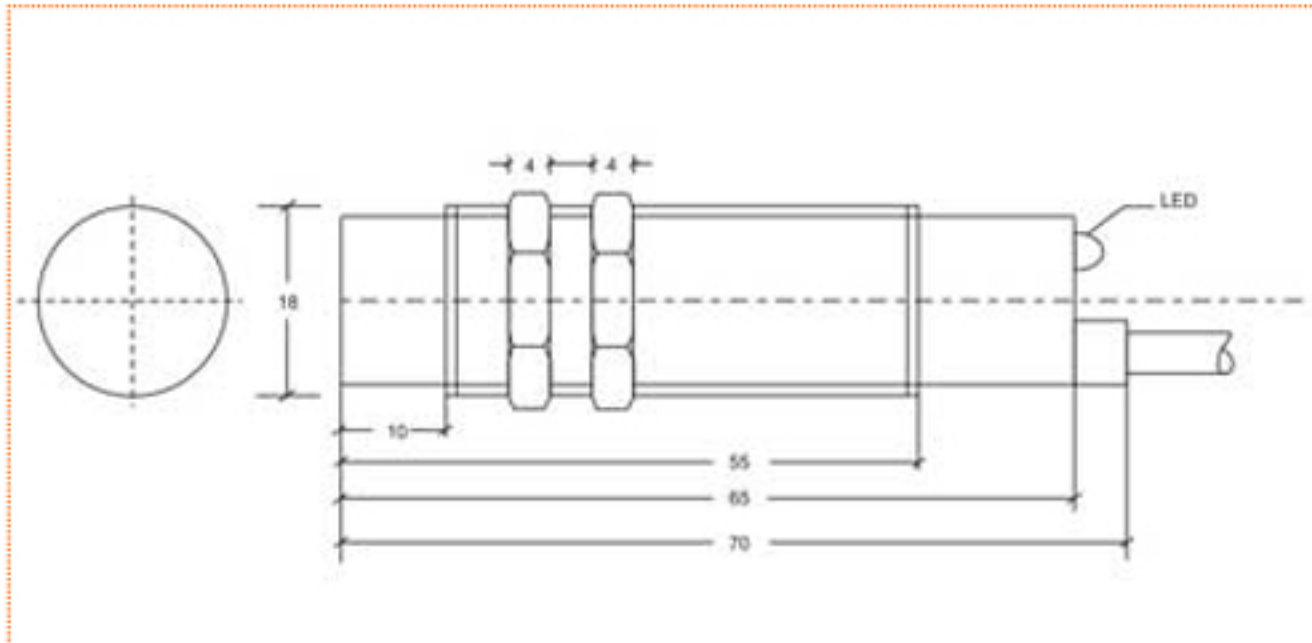

Technical Specifications

TYPE	DIFFUSED SCAN
SIZE	M-18
Type	3 – WIRE DC Diffused Scan
Sensing Distance (mm)	500
Object(mm)	White Glossy Paper {200X200 mm}
Logics	PNP / NPN
Frequency	1Khz
Contact	NO/NC/1NO+NC
Supply Voltage	12-24 VDC
Load Current	100mA
Response time (m sec)	20
Display	LED
Circuit Protection	Reverse Polarity / Short Circuit
Protection	Ip66
Housing Material	Brass Nickel Plated
Wire(sq. mm)	3C x 0.20

Ordering Code

UT I-18 05 N O (F)

UT	UNITECH
I	Inductive
18	Diameter of Switch
05	Sensing Distance
N	NPN Logic
O	Normally Open Contact
(F)	Flush Type


P = PNP Logic	N = NPN Logic
O = Normally Open Contact	C = Normally Close Contact
05 = Sensing Distance	08 = Sensing Distance
(F) = Flush Type	(NF) = Non-Flush Type

J. M. Engineering Co.

2

M-18

M-30

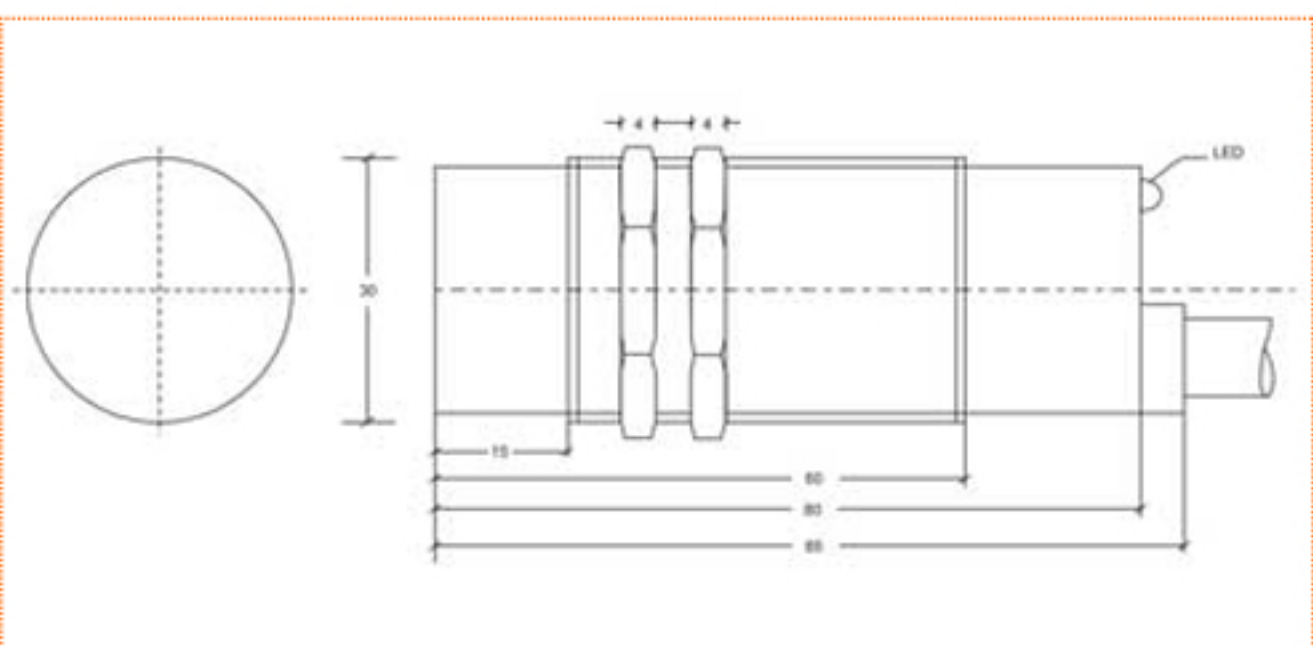

Technical Specifications

TYPE	DIFFUSED SCAN
SIZE	M-30
Type	3 – WIRE DC Diffused Scan
Sensing Distance (mm)	1000
Object(mm)	White Glossy Paper {200X200 mm}
Logics	PNP / NPN
Frequency	1Khz
Contact	NO/NC/1NO+NC
Supply Voltage	12-24 VDC
Load Current	100mA
Response time (m sec)	20
Display	LED
Circuit Protection	Reverse Polarity / Short Circuit
Protection	Ip66
Housing Material	Brass Nickel Plated
Wire(sq. mm)	3C x 0.20

Ordering Code

UT I-30 10 N O (F)

UT	UNITECH
I	Inductive
30	Diameter of Switch
10	Sensing Distance
N	NPN Logic
O	Normally Open Contact
(F)	Flush Type

P = PNP Logic	N = NPN Logic
O = Normally Open Contact	C = Normally Close Contact
10 = Sensing Distance	15 = Sensing Distance
(F) = Flush Type	(NF) = Non-Flush Type

J. M. Engineering Co.

3