



J. M. Engineering Co.


A Complete Process Control automation

Dual Wall Heat Shrink Tubing

Heat Shrink Sleeve



Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing W-1-SB(2X)

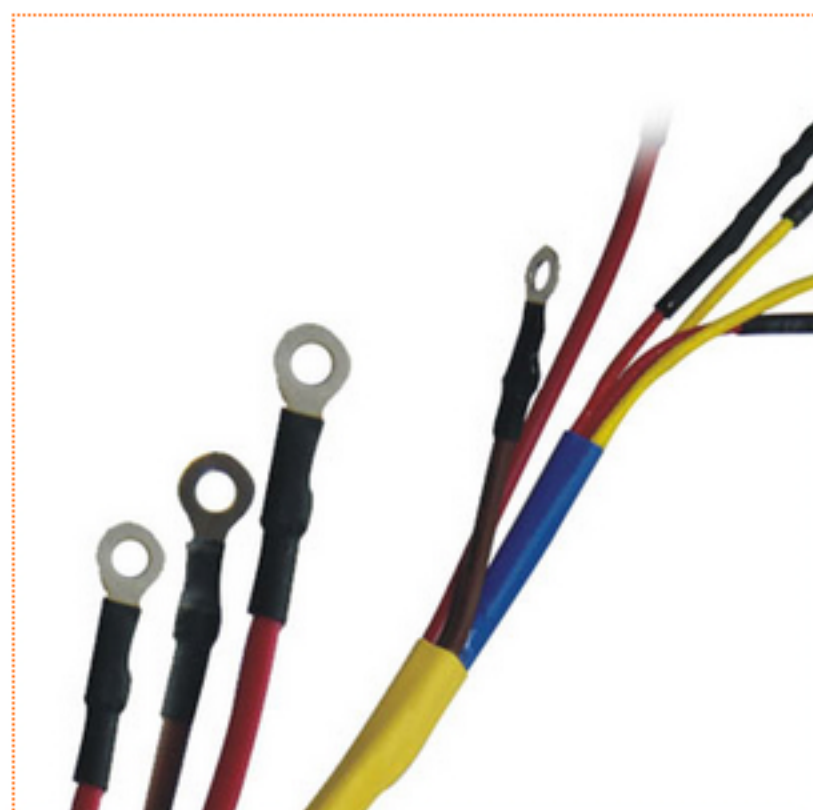

Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing

Adhesive lined heat shrink tubing with environmental sealing capability for a wide variety of electrical applications, including automotive and marine wire harness, wire splices, breakouts, and connector-to-cable transitions.

Features:

1. Flexible
2. Zero halogen
3. Flame retardant
4. Low smoke generation if burning
5. Continuous Operating Temperature:-45°C to 125°C
6. Shrink Temperature:120°C
7. RoHS and Sony compliant

Dimensions

Size		As supplied	After Recovery			Standard Package
Inch	mm	Internal Diameter(mm)	Internal Diameter(mm)	Total Wall Thickness(mm)	Adhesive Thickness(mm)	Spool Length (m/spool)
1/16	1.6	1.6	0.8	0.60±0.15	0.3±0.1	200
3/32	2.4	2.4	1.2	0.70±0.15	0.35±0.1	200
1/8	3.2	3.2	1.6	0.70±0.15	0.35±0.1	200
3/16	4.8	4.8	2.4	0.80±0.15	0.4±0.1	100
1/4	6.4	6.4	3.2	0.80±0.15	0.4±0.1	100
5/16	7.9	7.9	3.9	0.90±0.15	0.45±0.1	100
3/8	9.5	9.5	4.8	0.90±0.15	0.45±0.1	1.22
1/2	12.7	12.7	6.4	0.95±0.20	0.45±0.1	1.22
5/8	15.9	15.9	7.9	0.95±0.20	0.45±0.1	1.22
3/4	19.1	19.1	9.5	1.0±0.20	0.45±0.1	1.22
1	25.4	25.4	12.7	1.1±0.20	0.50±0.1	1.22
1 1/4	31.8	31.8	15	1.15±0.20	0.50±0.1	1.22
1 1/2	38.1	38.1	19	1.25±0.20	0.50±0.1	1.22
1 3/4	44.5	44.5	22	1.35±0.20	0.55±0.1	1.22
2	50.8	50.8	25.4	1.5±0.25	0.60±0.1	1.22

2

J. M. Engineering Co.

Technical Data

Test Item	Test Method	Test Result
Tensile Strength(Mpa)	ASTM D2671	≥10.4
Elongation%	ASTM D2671	≥300
Tensile Strength after Aging (Mpa)	UL 224 158×168hr	≥7.3
Elongation after Aging%	UL 224 158°C×168hr	≥200
Dielectric Strength	IEC 243	≥ 15
Volume Resistance(Ω.cm)	ASTM D876	≥ 1014

Hot Melting Adhesive Property

Test Item	Test Method	Test Result
Water absorption ratio:	ASTM-D570	<0.2%
Softening point	ASTM-E8	95°C
Strength of peeling(PE)	ASTM-D1000	120N/25m
Strength of peeling(AL)	ASTM-D1000	80N/25m

3

J. M. Engineering Co.